

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

10/517918

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number  
WO 03/107330 A1

- (51) International Patent Classification<sup>7</sup>: **G11B 7/00**
- (21) International Application Number: **PCT/IB03/02333**
- (22) International Filing Date: **27 May 2003 (27.05.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
02077407.1      18 June 2002 (18.06.2002)      EP
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**;  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- (72) Inventor; and  
(75) Inventor/Applicant (for US only): **HELLMIG, Joachim, W. [DE/NL]**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: **DEGUELLE, Wilhelmus, H., G.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR RECORDING MARKS REPRESENTING DATA IN AN INFORMATION LAYER OF AN OPTICAL RECORD CARRIER

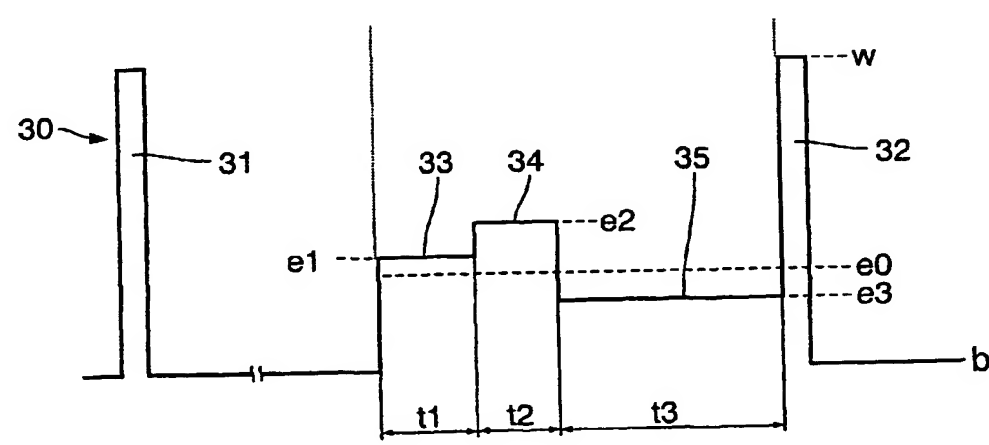

(57) Abstract: The present invention relates to a method of recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, each mark being written by a sequence of pulses, the recorded marks being erasable by irradiating the information layer with an erase radiation beam. In order to achieve a reduction of the temperature of a transparent heat sink of a dual-layer optical recording medium without compromising the direct overwrite of old data, it is proposed according to the present invention that said erase radiation beam has a first erase power level (e1) for a first erase period (t1), a second erase power level (e2) higher than or equal to said first erase power level (e1) for a second erase period (t2), and a third erase power level (e3) lower than said second erase power level (e2) for a third erase period (t3).

WO 03/107330 A1

Method and device for recording marks representing data in an information layer of an optical record carrier

The present invention relates to a method of recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, each mark being written by a sequence of pulses, the recorded marks being erasable by irradiating the information layer with an erase radiation beam. The invention further relates to a corresponding optical recording device for recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, the device comprising a radiation source providing said radiation beam and a control unit for controlling the power of said radiation beam such that each mark is written by a sequence of pulses, the recorded marks being erasable by irradiating the information layer with an erase radiation beam.

Such a method and device are known from the WO01/04885 A1. Therein a mark is written in a phase change layer of a record carrier by a sequence of radiation pulses. A trailing power level having a value higher than the erase power level is introduced after a last write pulse in a sequence of radiation pulses. Additionally, the power level of the last write pulse in a sequence may be raised. This results in a reduced jitter of the marks being written, especially when writing takes place at high recording speeds. In this way marks are written in a phase change layer of a record carrier. The area between two successive marks is referred to as a space. The pattern of marks and spaces on a record carrier represents the information stored on that record carrier.

A factor-of-two storage capacity increase of a rewritable optical recording media can be achieved by introduction of a second recording layer such as described in "Title Phase-Change Recording: Options for 10 to 20 GB (dual layer, high NA, and blue)", Wierenga H. A., Proceedings of the SPIE The International Society for Optical Engineering (USA), vol. 3401, p. 64-70, 1998. To access both recording layers, the layer closer to the objective lens of the recording device needs to be transparent. Making such a transparent recording layer requires a major change of the recording layer stack-design. In single layer discs, this stack consists typically of a metal mirror layer, dielectric interference layers, and a phase-change layer. However, these types of stacks are not transparent due to the metal

mirror layer. Leaving out of the metal mirror layer in dual-layer discs has not only consequences for the behavior of the stack (that is becoming at least partially transparent), but also for its thermal characteristics.

5 In transparent dual-layer recording stacks, transparent heat sinks are introduced to achieve at least a moderate cooling of the phase-change layer without compromising the transparency of the stack. The slower cooling characteristic of such a stack results in a heat accumulation which causes two kinds of problems. First, longer cooling gaps in between the write pulses are needed during writing of marks. This can be achieved by using shorter write pulses. Second, the temperature of the heat sink needs to be low at the  
10 beginning of a mark. The most straightforward solutions are a reduction of the erase power during the space write-strategy or the introduction of a cooling gap before the first write pulse. However, experiments in optical recording systems (such as, for example, DVD) have shown that both strategies result in a poor overwrite performance.

15 It is therefore an object of the present invention to provide a method and a device for recording marks in an information layer of a record carrier by which a reduction of the temperature of a transparent heat sink is accomplished without compromising the overwrite performance.

20 This object is achieved according to the present invention by providing a method according to the preamble wherein said erase radiation beam has a first erase power level for a first erase period, a second erase power level higher than or equal to said first erase power level for a second erase period, and a third erase power level lower than said second power level for a third erase period. The object is further achieved by providing a  
25 corresponding recording device as claimed in claim 11.

The present invention is based on the idea to divide the space write strategy into at least two, preferably three, different power levels. At the beginning of a space, a one- or two-stage erase power level boost is used to heat the stack quickly. The initial stage of a one-stage boost or the first stage in case of a two-stage boost is needed to prevent re-  
30 crystallization at the end of the previous mark. Thereafter, that is after said initial stage or after the second boost of a two-stage boost, the erase power is lowered to a value which is substantially lower than that required in conventional space write strategies without a boost. The net result is the desired reduction of the stack temperature before the following mark to be recorded.

The combination of the above described new write strategy and a stack with one transparent heat sink layer, preferably made of Indium Tin Oxyde (ITO), especially results in a very good overwrite performance.

Embodiments of the invention are defined in the dependent claims.

- 5 Advantageous embodiments for the different power levels and the different erase periods used in the space write strategy are defined in claims 2 to 7. Preferably, the third erase power level is lower than the erase power level applied in conventional space write strategies, while at least the second erase power level is higher than the conventional erase power level.

- 10 In an embodiment of the invention, the first and third erase power levels are substantially equal and lower than the second erase power level.

Furthermore, the sum of the first and second erase periods is preferably shorter than half the shortest effect (i.e. mark) length, for example a 1T duration for a code with 2T as the shortest effect (i.e. mark) length.

- 15 The space write strategy according to the present invention using a two-stage erase boost is preferably applied to direct overwrite (DOW) in a (semi-) transparent layer of an optical record carrier comprising at least two information layers. Write strategies using such an erase boost could, for example, be applied in DVD and DVR dual-layer recording.

- 20 The information layer is preferably of the type which has a phase which is reversibly changeable between a crystal phase and an amorphous phase. Because of the similarity of the cooling problems in dual-layer record carriers and in high speed recording of single layer record carriers, the method and recording device according to the present invention, in which the above described erase power level boost is applied, could also be advantageously applied to high-speed CD-RW, DVD, and DVR recording.

- 25 The invention will now be explained in more detail hereinafter on the basis of preferred embodiments and with reference to the accompanying drawings, in which

Fig. 1a shows a cross-section of a dual-layer record carrier,

Fig. 1b shows a cross-section of a semi-transparent information layer,

- 30 Fig. 2 shows diagrams illustrating a data signal and a corresponding control signal for controlling the power levels of the radiation beam according to an embodiment of the present invention having a two-stage boost,

Fig. 3 shows results of measurements of the single-track jitter illustrating the advantageous effect of the invention,

Fig. 4 is a block diagram of a recording device according to the invention, and

Fig. 5 shows diagrams illustrating control signals according to embodiments of the present invention having an one-stage boost.

Fig. 1a is a schematic representation of a dual-layer disc-shaped record carrier

5 1. The disc 1 comprises a polycarbonate substrate 10, two recording layers of the phase-change type 11, 13 separated by a spacer layer 12, and a cover layer 14. Data recorded in the information layers 11, 13 are written or read by a radiation beam 2, such as a laser light beam. If data are to be read from or written into the information layer 11, the other information layer 13 closer to the surface facing the laser beam 2 should be, at least partially  
10 transparent.

Fig. 1b shows an example of a cross-section of such a semi-transparent information layer 13. As shown, it comprises a phase-change layer 132 and a transparent heat sink layer 134 which are separated and covered by dielectric layers 131, 133, 135. Other stack arrangements are alternatively possible.

15 Fig. 2 shows diagrams of two signals used in an embodiment of the present invention, a digital data signal 20 and a control signal 30. Fig. 2a gives the value of the digital data signal 20 as a function of time, the value of the signal representing information to be recorded. When recording this data signal 20, a "high" period 21 is recorded as a mark having a length corresponding to the duration of the "high" period. A "low" period 22 is  
20 recorded as a blank area, a space, situated between the marks and having a length corresponding to the duration of the "low" period. In general, the length of a mark is substantially equal to the number of channel bit periods (number of periods of the data clock) of the data signal times the writing speed.

The data is written in an optical record carrier 1 having one or more  
25 information layers, such as an optical record carrier having two information layers as shown in Fig. 1. The marks representing the data are written along a track in the information layer by irradiating the information layer with a pulsed radiation beam. The marks are areas of the information layer having optical characteristics different from their surroundings, thus rendering an optical reading of marks possible.

30 Fig. 2b shows a control signal 30 corresponding to the data signal 20 in an embodiment of the invention. The control signal 30 is used for modulating the power of a radiation beam with which the marks are written on the information layer, where it is assumed that the power level of the radiation beam is proportional to the level of the control signal. Fig. 2b shows, as a function of time, a last pulse 31 of a sequence of write pulses for

writing a mark 21. These write pulses have a write power level  $w$ , while the power level between the write pulses in a sequence is a bias power level  $b$ . Furthermore, a first pulse 32 of a sequence of write pulses for writing the next mark 21 after the space 22 is shown on the right-hand side. Previously written marks, if any, between the marks 21 being written are  
5 erased by means of an erase write-strategy according to a preferred embodiment of the present invention.

At the beginning of the space 22, a two-stage boost is used to heat the stack quickly. The low-level first stage 33 having a first erase power level  $e1$  for a first erase period  $t1$  is used to prevent re-crystallization at the end of the previous mark 21. Thereafter, a  
10 second boost 34 is applied having a second erase power level  $e2$  higher than the first erase power level  $e1$  for a second erase period  $t2$ . After the second boost 34, the erase power is lowered to a third erase power level  $e3$  lower than the first erase power level  $e1$  for a third erase period  $t3$ , that is, for the remaining time of the space 22 (reference numeral 35).

Also shown as a dashed line in this diagram is a conventional space write-  
15 strategy without erase boost according to the invention. In such a conventional space write strategy, the erase power level is set to a constant level  $e0$  higher than the third erase power level  $e3$  during the whole period for writing the space 22. It should be noted that also a one-stage boost, where  $e1$  is equal to  $e2$ , may be used.

The net result of the space write strategy according to the invention is the  
20 desired reduction of the stack temperature. The combination of this new write strategy and a stack with one transparent heat sink layer as shown in Fig. 1 results in a very good overwrite performance, as can be seen from Fig. 3. Here the average single-track (ST) jitter is shown as a function of the number of direct overwrite (DOW) cycles. A conventional write strategy with a cooling gap at the end of the mark shows a poor overwrite performance (line 41 with  
25 diamonds), whereas boosting of the erase power level at the beginning of a space together with a reduced erase power  $e3$  results in a good overwrite performance (line 42 with squares), as is illustrated in Fig. 2b

It should be noted that the optimum values of the erase power levels  $e1$ ,  $e2$ ,  $e3$  as well as the erase periods  $t1$ ,  $t2$ ,  $t3$  depend on the properties of the recording medium, the  
30 laser pulse, and the laser spot on the information layer. As an example, the following values could be used:

$t1=1/2T$ ;  $t2=1/2T$ ;  $e1=2.3\text{mW}$ ;  $e2=2.6\text{mW}$ ;  $e3=1.1\text{mW}$ .

It should be noted that, instead of the two-stage boost as shown in Fig. 2b, a one-stage boost may alternatively be used. An embodiment of such an one-stage boost is

illustrated in Fig. 5a where the first and second erase power levels  $e_1$  and  $e_2$ , which together form the one-stage boost, are equal but higher than the third erase power level  $e_3$ . The first and second erase power levels  $e_1$  and  $e_2$  of the boost are higher than the constant erase power level  $e_0$  used in a conventional space write strategy. A further embodiment is illustrated in Fig. 5b where the first and third erase power levels  $e_1$  and  $e_3$  are equal, but lower than the second erase power level  $e_2$  forming the one-stage boost. Again, the second erase power levels  $e_2$  of the boost is higher than the constant erase power level  $e_0$  used in a conventional space write strategy.

It should be noted that the term "equal" does not necessarily mean "exactly the same", but rather "approximately equal", since slight differences from the equal level do not take the advantages of the invention away.

Fig. 4 shows an embodiment of a recording device according to the present invention for recording data on a disc-shaped optical record carrier 1. Alternatively, the record carrier may be in the form of a tape. A data signal  $S_D$ , comprising the information to be recorded, is applied to a control unit 60. A current source 61 within the control unit 60 has five outputs, A, B, C, D, and E. Output A provides a current which, when fed into a radiation source 51 through a control signal  $S_C$ , will result in a radiation beam 52 having a write power level ( $w$ ). Likewise, outputs B, C, D and E provide currents resulting in the bias power level ( $b$ ), the first erase power level ( $e_1$ ), the second erase power level ( $e_2$ ), and the third erase power level ( $e_3$ ), respectively. The current of each output A, B, C, D, and E can be selected by a switch unit 62. The switch unit 62 is operated by a pattern generator 63 controlled by the data signal  $S_D$  and a clock signal  $S_K$ . The pattern generator 63 transforms the data signal  $S_D$  into the control signal having the power levels in accordance with a desired pattern. The clock signal  $S_K$  is obtained from a clock generator 58.

The control signal  $S_C$  provided at the output of the control unit 60 is applied to the radiation source 51 and controls the power of the radiation beam 52 generated by the radiation source 51. The radiation beam is focussed onto an information layer 11 (or 13) of the record carrier 1 by a lens 53. The disc-shaped record carrier 1 is rotated about its center by a motor 54.

## CLAIMS:

1. A method of recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, each mark being written by a sequence of pulses, the recorded marks being erasable by irradiating the information layer with an erase radiation beam,  
5 characterized in that said erase radiation beam has a first erase power level for a first erase period, a second erase power level higher than or equal to said first erase power level for a second erase period, and a third erase power level lower than said second erase power level for a third erase period.
- 10 2. A method as claimed in claim 1,  
wherein said third erase power level is lower than said first erase power level.
3. A method as claimed in claim 1,  
wherein said first erase power level and said third erase power level are substantially equal  
15 and lower than said second erase power level.
4. A method as claimed in claim 1,  
wherein said second erase power level is lower than the write power level (w) of said pulses  
of said pulsed radiation beam for recording marks.  
20
5. A method as claimed in claim 1,  
wherein said third erase power level is higher than the bias power level (b) between said  
pulses of said pulsed radiation beam for recording marks.
- 25 6. A method as claimed in claim 1,  
wherein said first erase period and said second erase period are shorter than said third erase  
period.
7. A method as claimed in claim 1,



wherein the sum of said first erase period and said second erase period is shorter than half the shortest mark being recorded.

8. A method as claimed in claim 1,

5 wherein said information layer has a phase which is reversibly changeable between a crystal phase and an amorphous phase.

9. A method as claimed in claim 1,

wherein said record carrier comprises at least two information layers.

10

10. A method as claimed in claim 9,

wherein at least one of said at least two information layers is an at least partially transparent layer.

15

11. A recording device for recording marks representing data in an information layer of a record carrier by irradiating the information layer by means of a pulsed radiation beam, the device comprising a radiation source providing said radiation beam and a control unit for controlling the power of said radiation beam, such that each mark is written by a sequence of pulses and the recorded marks are erasable by irradiating the information layer

20

with an erase radiation beam, characterized in that a control unit is operative for controlling said radiation beam such that said erase radiation beam has a first erase power level for a first erase period a second erase power level higher than or equal to said first erase power level for a second erase period, and a third erase power level lower than said second erase power level for a third erase period.

25

12. A recording device as claimed in claim 11,

wherein said control unit is operative for controlling said radiation beam such that the third erase power level is lower than the first erase power level.

30

13. A recording device as claimed in claim 11,

wherein said control unit is operative for controlling said radiation beam such that the first erase power level and the third erase power level are substantially equal and lower than the second erase power level.

1/3

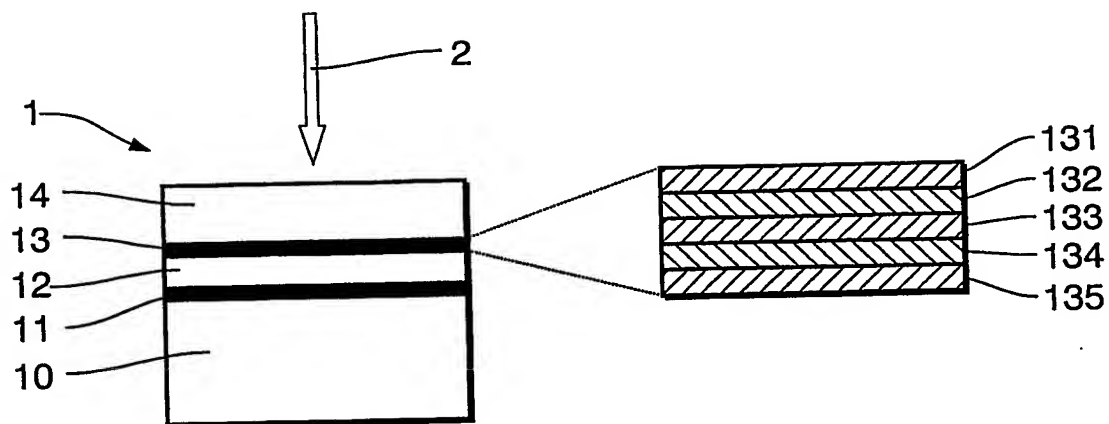


FIG. 1a

FIG. 1b

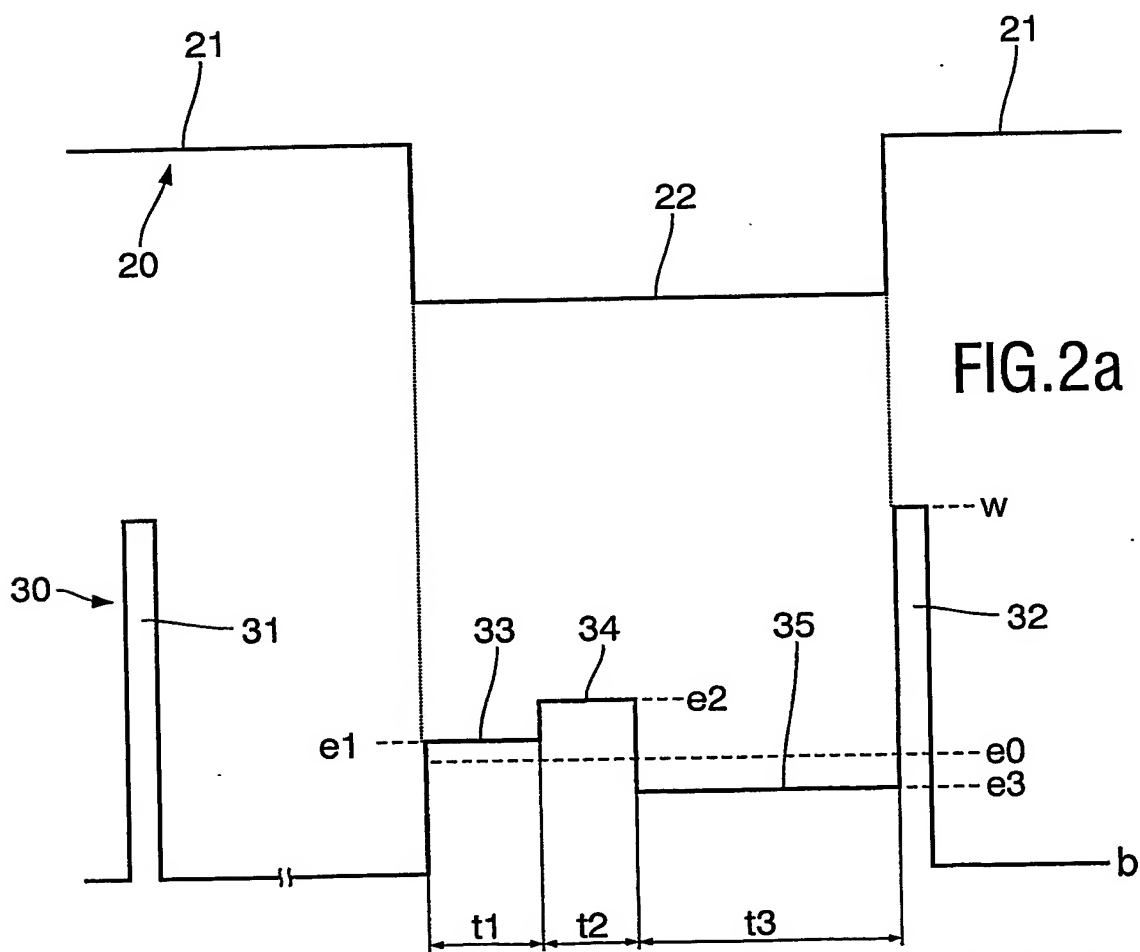


FIG. 2a

FIG. 2b

2/3

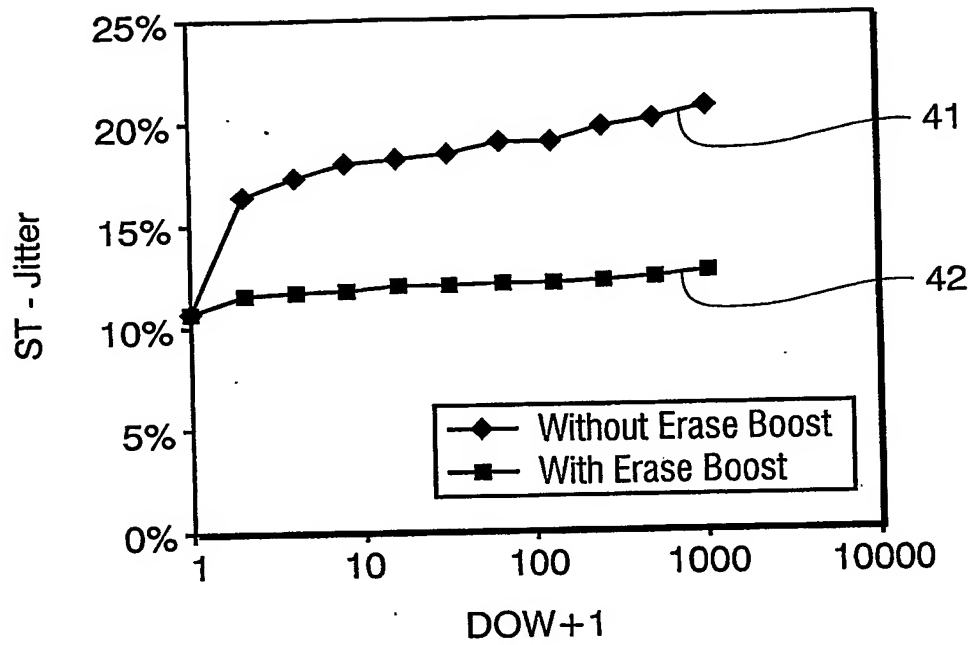


FIG.3

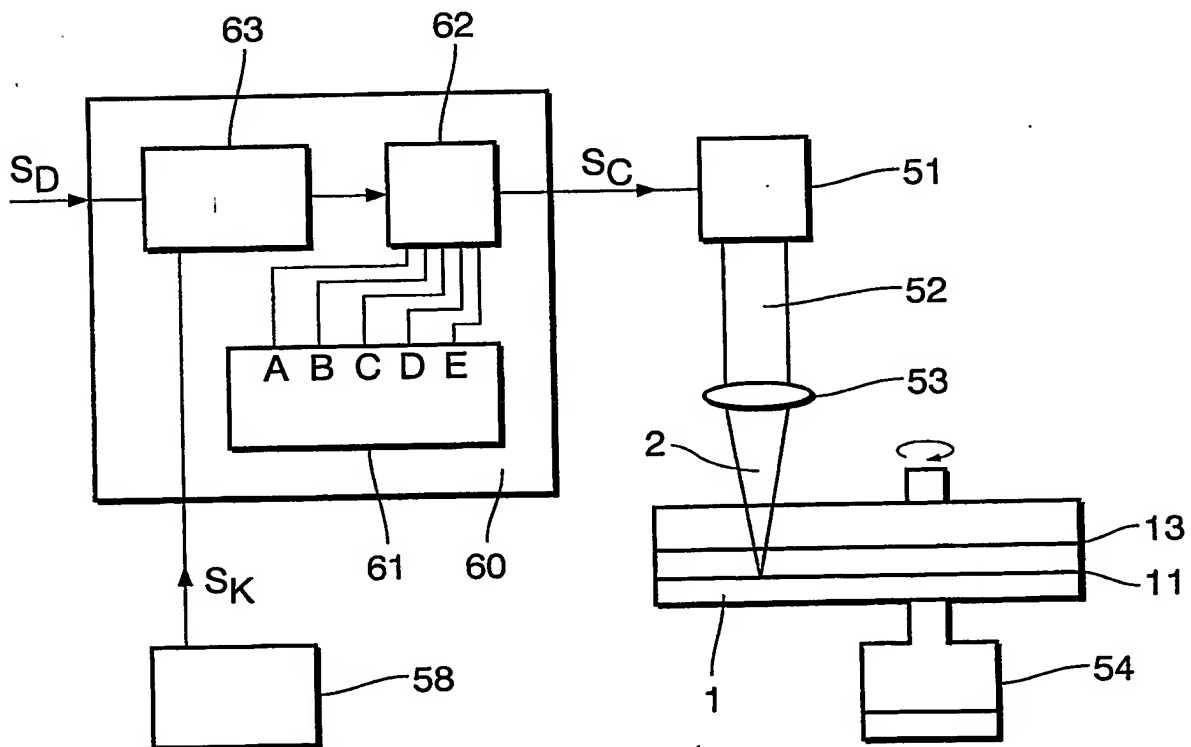


FIG.4

3/3

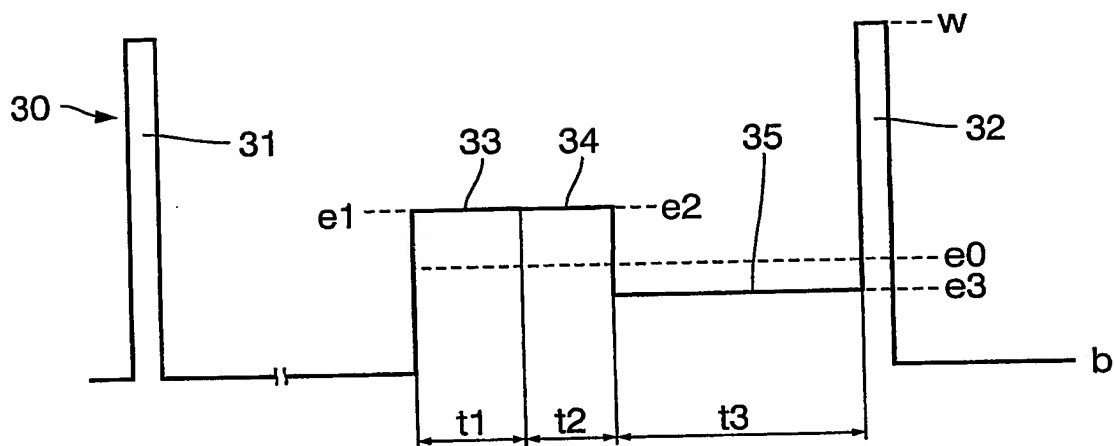


FIG.5a

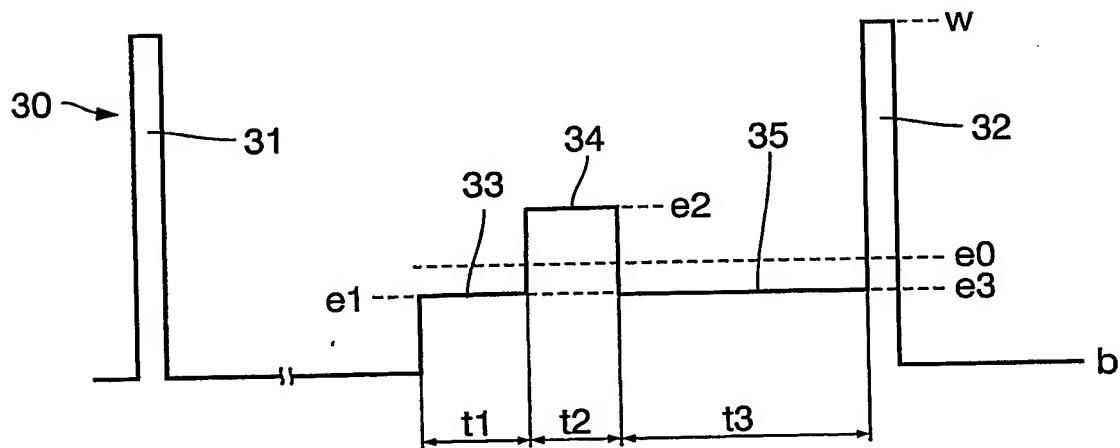


FIG.5b

# INTERNATIONAL SEARCH REPORT

Int ional Application No  
PCT/IB 03/02333

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B7/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 272 100 B1 (MAEDA TAKESHI ET AL) 7 August 2001 (2001-08-07) column 1, line 16-30, 45-53	1, 3-5, 8, 11, 13
Y	column 3, line 7 -column 8, line 39 figures 3A-C, 6E	9, 10
X	US 2002/003762 A1 (DEKKER MARTIJN JEROEN) 10 January 2002 (2002-01-10) paragraphs '0001!-'0037!; figure 1B	1
X	US 5 291 470 A (NISHIUCHI KENICHI ET AL) 1 March 1994 (1994-03-01) column 5, line 19-65; figures 1A-D	1
X	EP 0 318 200 A (MATSUSHITA ELECTRIC IND CO LTD) 31 May 1989 (1989-05-31) page 1, line 39-43 page 2, line 34-43; figure 2B	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Z\* document member of the same patent family

Date of the actual completion of the international search

2 October 2003

Date of mailing of the international search report

17/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Stemmer, M

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 03/02333

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2001/012257 A1 (YOSHIZAWA TAKASHI ET AL) 9 August 2001 (2001-08-09) paragraphs '0003!', '0004!'; figure 1	9,10
A	EP 0 286 126 A (HITACHI LTD) 12 October 1988 (1988-10-12) column 16, line 47 -column 17, line 5	1
A	US 6 285 647 B1 (DUCHATEAU JOHAN P W B ET AL) 4 September 2001 (2001-09-04) column 1, line 36 -column 2, line 55 column 4, line 29 -column 5, line 44; figure 1B	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 03/02333

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6272100	B1	07-08-2001	JP 10289461 A 27-10-1998
			US 2002191511 A1 19-12-2002
			US 2001015945 A1 23-08-2001
			US 2001007548 A1 12-07-2001
			US 2002015368 A1 07-02-2002
US 2002003762	A1	10-01-2002	AU 5835301 A 20-11-2001
			BR 0106321 A 19-03-2002
			CA 2378758 A1 15-11-2001
			CN 1386268 T 18-12-2002
			CZ 20020072 A3 12-06-2002
			WO 0186642 A1 15-11-2001
			EP 1206772 A1 22-05-2002
			HU 0202465 A2 28-12-2002
			TW 508574 B 01-11-2002
US 5291470	A	01-03-1994	JP 1245433 A 29-09-1989
			JP 2625843 B2 02-07-1997
			JP 1253828 A 11-10-1989
			JP 2574379 B2 22-01-1997
			DE 68916084 D1 21-07-1994
			DE 68916084 T2 16-02-1995
			EP 0335486 A2 04-10-1989
EP 0318200	A	31-05-1989	JP 1229425 A 13-09-1989
			JP 1817280 C 18-01-1994
			JP 5024566 B 08-04-1993
			JP 1138620 A 31-05-1989
			JP 2106712 C 06-11-1996
			JP 8014892 B 14-02-1996
			DE 3888296 D1 14-04-1994
			DE 3888296 T2 04-08-1994
			EP 0318200 A2 31-05-1989
			US 4980879 A 25-12-1990
US 2001012257	A1	09-08-2001	WO 0116947 A1 08-03-2001
EP 0286126	A	12-10-1988	JP 2796290 B2 10-09-1998
			JP 63253536 A 20-10-1988
			DE 3850430 D1 04-08-1994
			DE 3850430 T2 24-11-1994
			EP 0286126 A2 12-10-1988
			US 4982396 A 01-01-1991
US 6285647	B1	04-09-2001	WO 9836411 A2 20-08-1998
			EP 0895634 A2 10-02-1999
			JP 2000508820 T 11-07-2000